



J&V AUTOMATION
INDUSTRIAL TOOLING

PROFESSIONAL CRIMPING TOOLS

PRODUCT CATALOGUE 2026

Ferrule crimping, terminal crimping, wire stripping and cable cutting tools for industrial assembly and field service.



MINI SELF-ADJUSTING CRIMPING TOOL SERIES

FERRULE CRIMPING


TERMINAL CRIMPING

WIRE STRIPPING

CABLE CUTTING

BUILT FOR FIELD & FACTORY

Practical hand tools for everyday electrical assembly, maintenance and installation.

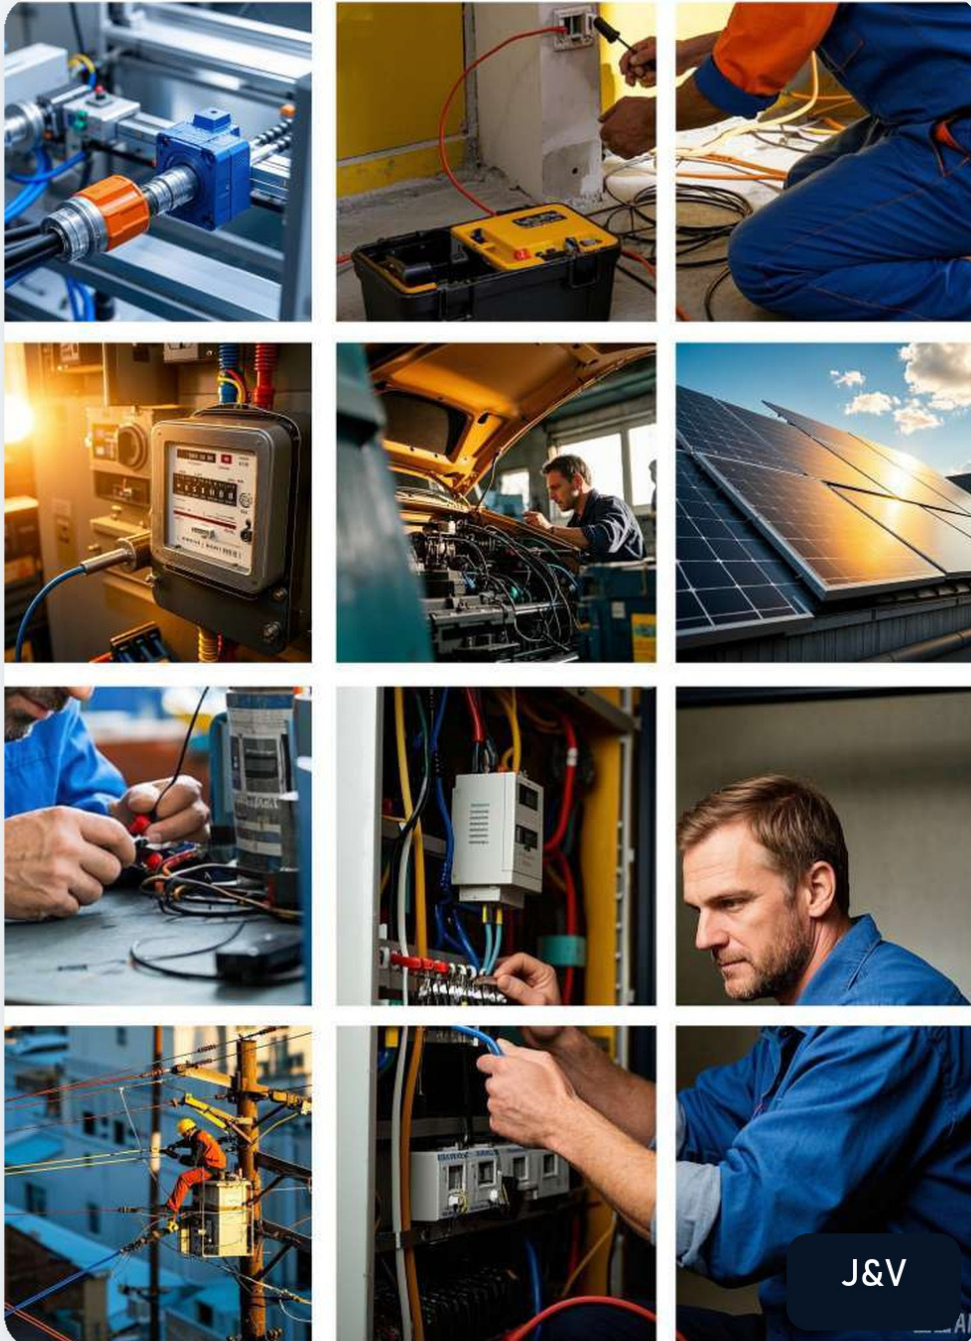

01

Electrical panel assembly

02

Machine wiring & maintenance

03

Automotive electrical service

04

Solar & field installation

Select the correct crimping range and terminal type for each application. Confirm specifications before ordering.

J&V

自适应E型管压接钳 HSC12 16-6

Mini-Type Self- Adjustable Crimping Plier



用于绝缘的和非绝缘的套管式端子，可按端子的要求横截面积自动调节，方便操作，方形压接套管式端子确保最佳的接触面钳压，符合DIN标准。

For the used of crimping of insulated and non-insulated bushing terminals. It is automatically adjusted according to the cross-sectional area of the terminals during crimping to facilitate the crimping operation of terminals of different sizes. After the bushings are crimped into a square shape It ensures the best contact surface and is DIN compliant.



优良的杠杆传动，使得操作更省力。受力闭锁装置(可释放)，确保精确、密封的压接，符合DIN标准。所有必要的部件采用特种钢经特殊淬火处理。

The lever of the pliers is designed reasonably and is very labor-saving at work. With Ratchet and Pawl, crimp quality can be guaranteed at crimp terminals. The results of the crimping are in accordance with the DIN standard. All important parts are quenched with special steel.

压力调节钮设计，可调至最佳压力输出，确保各种小型端子精密压接。

The pressure knob is designed to be adjusted to the optimum crimp range to ensure precisecrimping of small terminals.

复位装置，在您错误的操作之后可以进行复位，节省更的耗材。

Reset device, in case of your incorrect operationAfter completion, it can be resetSave on consumables.

工具参数 TOOL PARAMETERS

Model	HSC8 16-6	Applicable to	Tube-type Terminal
Crimping Range	0.08-16.0mm ²	American Standard/AWG	30-5
Length	205mm	Weight	550g

HSC8 6-4



工具参数 TOOL PARAMETERS

Model	HSC8 6-4	Applicable to	Tube-type Terminal
Crimping Range	0.25-10.0mm ²	American Standard/AWG	23-7
Length	175mm	Weight	350g

HSC8 6-6



工具参数 TOOL PARAMETERS

Model	HSC8 6-6	Applicable to	Tube-type Terminal
Crimping Range	0.25-6.0mm ²	American Standard/AWG	24-10
Length	175mm	Weight	350g

HSC8 16-4



工具参数 TOOL PARAMETERS

Model	HSC8 16-4	Applicable to	Tube-type Terminal
Crimping Range	0.08-16.0mm ²	American Standard/AWG	30-5
Length	205mm	Weight	550g

HSC8 16-6



工具参数 TOOL PARAMETERS

Model	HSC8 16-6	Applicable to	Tube-type Terminal
Crimping Range	0.08-16.0mm ²	American Standard/AWG	30-5
Length	205mm	Weight	550g

SN-06WF



工具参数 TOOL PARAMETERS

Model	SN-06WF	Applicable to	Tube-type Terminal
Crimping Range	0.25–6.0mm ²	American Standard/AWG	24–10
Length	190mm	Weight	350g

SN-2546B



工具参数 TOOL PARAMETERS

Model	SN-2546B	Applicable to	Solar connectors
Crimping Range	2.5–6.0mm ²	American Standard/AWG	14–10
Length	190mm	Weight	350g

SN-28B



工具参数 TOOL PARAMETERS

Model	SN-28B	Applicable to	TBA Spade Terminal
Crimping Range	0.25–1.0mm ²	American Standard/AWG	23–17
Length	190mm	Weight	350g

SN-48B



工具参数 TOOL PARAMETERS

Model	SN-48B	Applicable to	TBA Spade Terminal
Crimping Range	0.5–2.5mm ²	American Standard/AWG	23–14
Length	190mm	Weight	350g

SN-58B



工具参数 TOOL PARAMETERS

Model	SN-58B	Applicable to	TBA Spade Terminal
Crimping Range	0.25-1.5mm ²	American Standard/AWG	24-16
Length	190mm	Weight	350g

SN-68B



工具参数 TOOL PARAMETERS

Model	SN-68B	Applicable to	TBA Spade Terminal
Crimping Range	0.08-1.5mm ²	American Standard/AWG	28-18
Length	190mm	Weight	350g

SN-6



工具参数 TOOL PARAMETERS

Model	SN-6	Applicable to	Non-insulated terminals
Crimping Range	0.25–6.0mm ²	American Standard/AWG	24–16
Length	190mm	Weight	350g

SN-02C



工具参数 TOOL PARAMETERS

Model	SN-02C	Applicable to	Insulated terminals
Crimping Range	0.25–2.5mm ²	American Standard/AWG	24–14
Length	190mm	Weight	350g

SN-2549



工具参数 TOOL PARAMETERS

Model	SN-2546	Applicable to	Non-insulated terminals
Crimping Range	0.08-1.0mm ²	American Standard/AWG	28-18
Length	190mm	Weight	350g

HS-30J



工具参数 TOOL PARAMETERS

Model	HS-30J	Applicable to	Insulated terminals
Crimping Range	0.5–6.0mm ²	American Standard/AWG	21–10
Length	230mm	Weight	520g

HS-40J



工具参数 TOOL PARAMETERS

Model	HS-40J	Applicable to	Insulated terminals
Crimping Range	0.25–6.0mm ²	American Standard/AWG	23–10
Length	230mm	Weight	520g

HS-2546B



工具参数 TOOL PARAMETERS

Model	HS-2546B	Applicable to	Solar connectors
Crimping Range	2.5–6.0mm ²	American Standard/AWG	13–7
Length	230mm	Weight	520g

HS-03BC



工具参数 TOOL PARAMETERS

Model	HS-03BC	Applicable to	Non-insulated tabs and receptacles
Crimping Range	0.5–6.0mm ²	American Standard/AWG	20–10
Length	230mm	Weight	520g

HS-10WF



工具参数 TOOL PARAMETERS

Model	HS-10WF	Applicable to	Tube-type Terminal
Crimping Range	0.5-10.0mm ²	American Standard/AWG	20-7
Length	230mm	Weight	520g

HS-35WF



工具参数 TOOL PARAMETERS

Model	HS-35WF	Applicable to	Tube-type Terminal
Crimping Range	6-35mm ²	American Standard/AWG	9-2
Length	230mm	Weight	520g

HS-05H



工具参数 TOOL PARAMETERS

Model	HS-05H	Applicable to	Coaxial cable
Crimping Range	RG55,58,59,62,5,6,21,140,141,142,143,210,212,222,223,303,304,400,BELDEN 8279,8281,9231,9141		

HS-103



工具参数 TOOL PARAMETERS

Model	HS-103	Applicable to	Crimping cap
Crimping Range	1.0-6.0mm ²	American Standard/AWG	22-10
Length	230mm	Weight	520g

HS-10A



工具参数 TOOL PARAMETERS

Model	HS-10A	Applicable to	Non-insulated terminals
Crimping Range	0.5–10.0mm ²	American Standard/AWG	20–7
Length	230mm	Weight	520g

HS-2048



工具参数 TOOL PARAMETERS

Model	HS-2048	Applicable to	Spark Plug Connector
Crimping Range	8–8.5mm	American Standard/AWG	–
Length	230mm	Weight	520g

HS-056FL

Powder Metallurgy Jaw



工具参数 TOOL PARAMETERS

Model	HS-056FL	Applicable to	Flag type receptacles
Crimping Range	0.5-2.5mm ²	American Standard/AWG	20-13
Length	230mm	Weight	520g

HS-04BC

Powder Metallurgy Jaw

NEW



工具参数 TOOL PARAMETERS

Model	HS-04BC	Applicable to	DuPont, TAB 2.8 terminal
Crimping Range	0.25-6.0mm ²	American Standard/AWG	30-16
Length	230mm	Weight	520g




工具参数 TOOL PARAMETERS

Model	KL-D9
Stripping Range	0.2-8mm ²
Cutting range	2.5mm ²
Length	155mm
Weight	180g



工具参数 TOOL PARAMETERS

Model	D3
Stripping Range	0.2-8mm ²
Cutting range	2.5mm ²
Length	190mm
Weight	150g

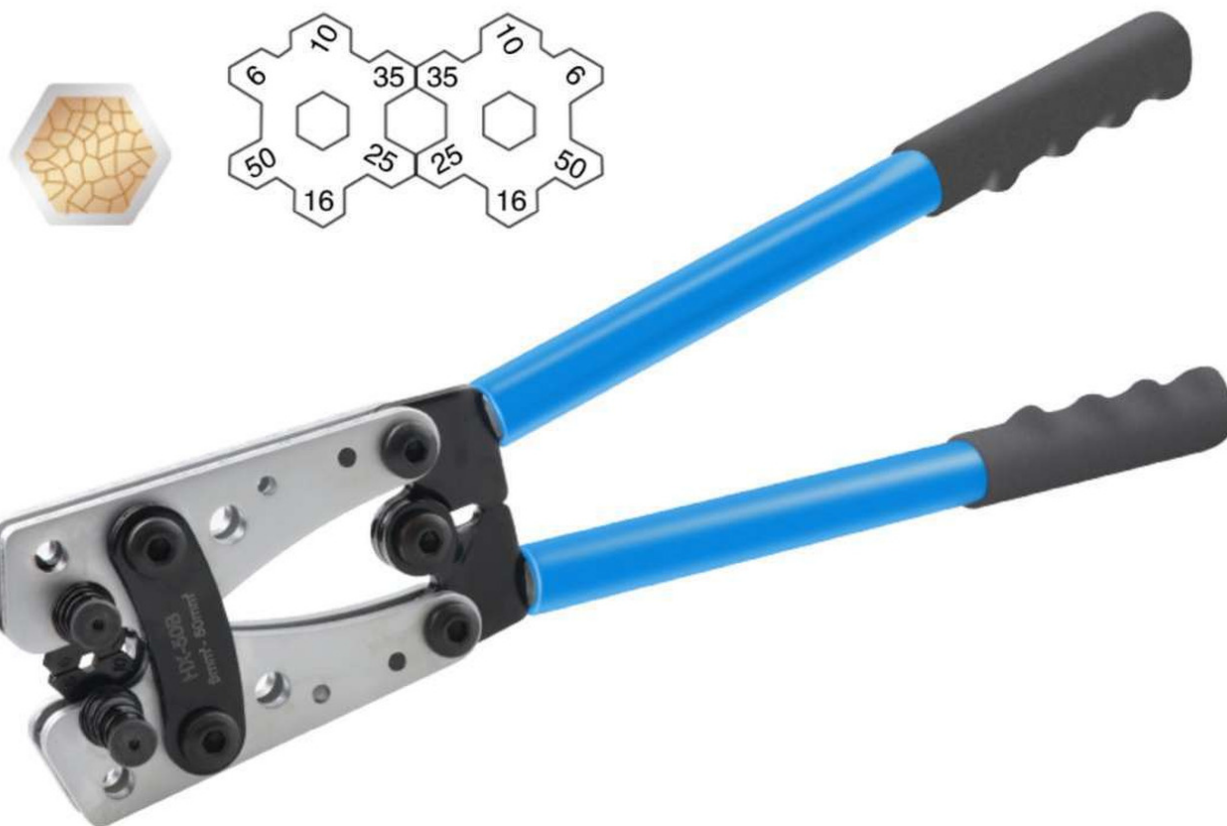

工具参数 TOOL PARAMETERS

Model	HS-04BC	Applicable to	DuPont, TAB 2.8 terminal
Crimping Range	0.25-6.0mm	American Standard/AWG	30-16
Length	230mm	Weight	520g



工具参数 TOOL PARAMETERS

Model	Cable Cutter
Stripping Range	60mm ²
Cutting range	60mm ²
Length	240mm
Weight	540g

Can be used with 50B



J&V AUTOMATION

INDUSTRIAL TOOLING

LET'S BUILD RELIABLE CONNECTIONS.

Send your model, quantity and application details. Our team will help confirm the suitable tool and commercial terms.

CONTACT US

COMPANY

Yueqing Jiaerwei Electronics Co., LTD

BRAND

J&V Automation

CONTACT

HUANG YINCHENG

MOBILE / WHATSAPP

+86 157 5775 9002

EMAIL

info@jv-automation.com

WEBSITE

<https://jv-automation.com/>

LOCATION

Wenzhou, Zhejiang, China